




POLYESTER ANCHOR STRAP 21MM - AZ900

REF: 30CM - 201060500000138PK | 60CM - 201060500000080PK | 80CM - 201060500000028PK
120CM - 201060500000110PK | 200CM - 201060500000118PK

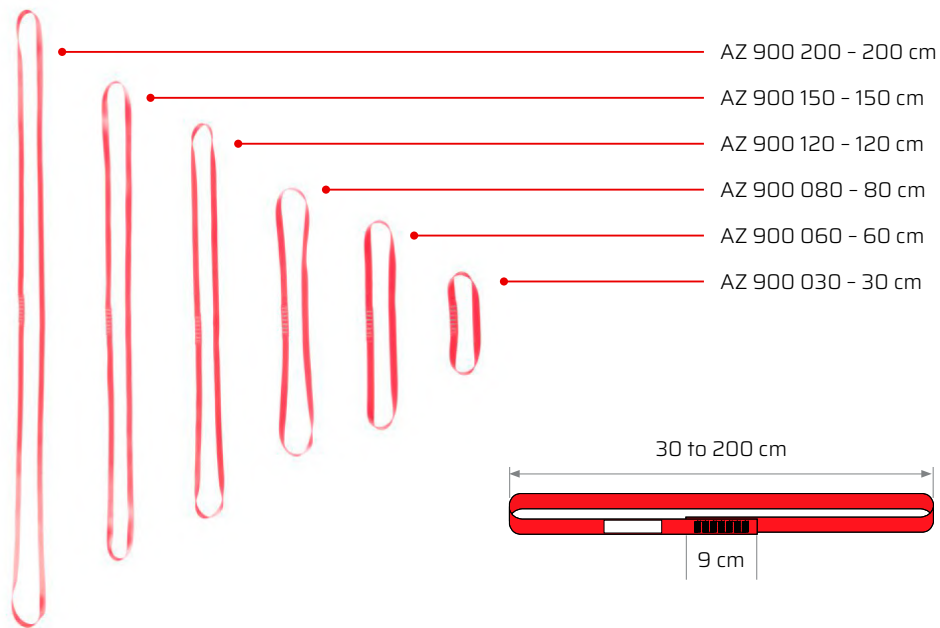

Description:

The webbing sling connector is a component of personal protective equipment against falls from a height and conforms to the standards EN 354:2010, EN 795:2012/B, and also EN 566:2017 for Mountaineering equipment.

Webbing sling connector is made of 21 mm width polyester webbing and the webbing endings are sewn forming a closed sling.

This equipment is for the use of one person only and is suitable for explosion-hazard zones. Available in lengths from 20 to 200 cm.

The Device can be used as:

- Anchorage device - a component of personal fall arrest equipment which is used to connect fall arrest devices to the structural anchor point
- Lanyard - a component of personal fall arrest equipment in conjunction with energy absorber

Notice: The AZ 900 anchorage strap should only be used as personal fall protection equipment and NOT FOR LIFTING EQUIPMENT.

Material: Strap: Polyester | Threads: Polyester

Static strength: 22 kN

Max. number of users: 1

Tape width: 21 mm

Tape thickness: 3 mm

Weight:

60 cm - 0,0765 kg
80 cm - 0,1150 kg
100 cm - 0,1230 kg

120 cm - 0,1453 kg
150 cm - 0,2000 kg
200 cm - 0,2300 kg



EN 354:2010
EN 566:2017
EN 795:2012 - Type B